

emergency LIGHTING

Decorative and economical unit with "EZ" install back plate feature. Has modern appearance and low-maintenance.



Optional self-diagnostic/self-test feature offers the ultimate in worry-free maintenance and reliability.

R-1

FEATURES

Completely self-contained

Fully automatic operation

Compact, low-profile design in neutral finish

Push-to-test switch

6-Volt, sealed lead acid, rechargeable, maintenance-free battery

Environmentally-coated, solid state charger

Automatic, low-voltage disconnect (LVD)

Universal transformer for 120 or 277 VAC


Listed for damp location

Universal mounting plate with "EZ" Quick Connect for rapid, labor-saving installation

Injection-molded, V-0 flame retardant, high-impact thermoplastic housing

Charge rate/power on LED indicator light

DIMENSIONS

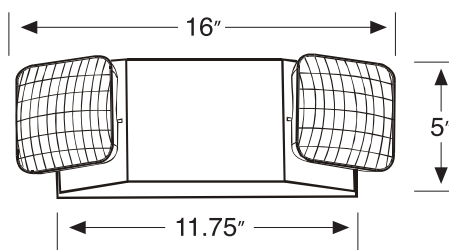

Ordering Information

Catalog Model #	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage	Battery Type	Damp Location	Options
R-1	90 Min	120V/277V	2x5.4W	6V	Sealed lead acid	Yes	HTR-Internal Heater*
R-1B (Black)	90 Min	120V/277V	2x5.4W	6V	Sealed lead acid	Yes	
R-1-NiCd	90 Min	120V	2x5.4W	6V	Nickel Cadmium	Yes	
R-1WC (with cord)	90 Min	120V/277V	2x5.4W	6V	Sealed lead acid	Yes	



When ordering, specify suffix "SDT" for the Self-Diagnostic Testing feature

*Note: For optional internal heater installed, specify suffix "HTR". The installed heater is controlled with an integrated thermostat control.